
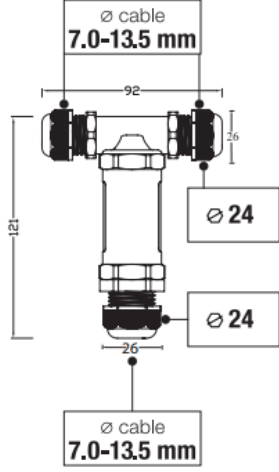
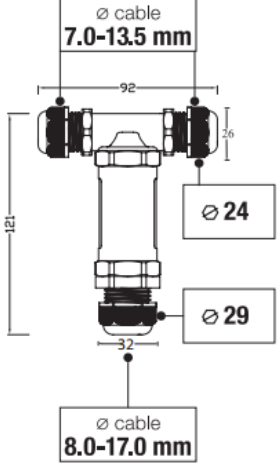



NON-LED

 **Wasserdichte T-Schraubverbindung**



Drees Lichttechnik GmbH Sundern/ GERMANY	Wasserdichte T-Schraubverbindung 238-472-51 238-473-51	Kategorie: NON-LED
		2014-10-17
		R002
	 <p>238-472-51</p>	 <p>238-473-51</p>
	Wasserdichte T-Schraubverbindung aus PA66GF UL90 VO GWT 960°C waterproofed T-screwed cable gland, material PA66GF UL90 VO GWT 960°C	
		 RoHS 2002/95/EC
Technische Daten / specifications:		
Beschreibung description	238-472-51	238-473-51
Gehäusematerial case material	PA66GF UL90 VO GWT 960°C	
Gehäusefarbe case colour	schwarz black	
Abmessungen dimensions	116x92mm	121x92mm
passende Kabel suitable cable	H05SS-F	H05SS-F
Pole pole	3	5
min Querschnitt / Durchmesser Eingang min cross-section / diameter input	3G1,5mm ² / Ø7mm	5G1,5mm ² / Ø8mm
max Querschnitt / Durchmesser Eingang max cross-section / diameter input	3G4mm ² / Ø13,5mm	5G2,5mm ² / Ø17mm
min Querschnitt / Durchmesser T-Stück max cross-section / diameter tee	3G1,5mm ² / Ø7mm	3G1,5mm ² / Ø7mm
max Querschnitt / Durchmesser T-Stück max cross-section / diameter tee	3G4mm ² / Ø13,5mm	3G4mm ² / Ø13,5mm
max Strom max current	32A	32A
max Spannung max voltage	450Vac	450Vac
max Druck max pressure	5 Bar	5 Bar
Temperatur temperature	-40°C - 85°C	-40°C - 85°C