
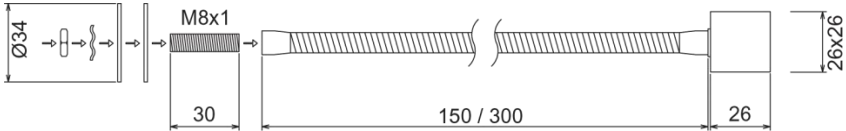


**LED-Leuchten Indoor**

 **LED-Flexleuchte, 350mA**



<b>Drees GmbH</b> <b>Sundern / GERMANY</b>	<b>Flexleuchte 350mA</b> <b>Silber Nasslack</b> <b>574-557-xx, 574-558-xx</b>	Kategorie: LED-Leuchten Indoor
		2016-07-08
		R000
		
LED-Flexleuchte 350mA LED flexible luminaire 350mA		CE IP20 III
<b>Technische Daten / specifications:</b>		
LED-Typ LED type	Seoul	
Eingangsstrom input current	350mA	
LED Leistung LED wattage	1,3W	
CRI CRI	>93	
Abstrahlwinkel beam angle	10°	
Umgebungstemperatur (ta) ambient temperature (ta)	-20°C – +45°C	
Gehäusetemperatur (tc) case temperature (tc)	max. 65°C	
Schutzklasse safety class	III	
Schutzart protection class	IP20	
Material material	Aluminiumgehäuse mit optischer Linse aluminum body and optic lens	
Abmessungen (ØxL) dimensions (ØxL)	27x181,5/331,5mm	
Montage mounting	Gewindestange M8x1, 30mm threaded rod M8x1, 30mm	
Zubehör accessory	Netzgerät 550-041-50 power supply 550-041-50	

**Folgende Angaben bei  $t_j = 25^\circ\text{C}$  / following information at  $t_j = 25^\circ\text{C}$** 

LED Farbe LED colour	Abstrahlwinkel Beam angle	Farbtemperatur colour temperature	Lichtstrom luminous flux	CRI	Flexlänge Flex length	Artikelnummer article number
warmweiß warm white	10°	typ. 2700K	typ. 70lm	93	150mm	574-557-70
neutralweiß neutral white	10°	typ. 4000K	typ. 80lm	93	150mm	574-557-40
warmweiß warm white	10°	typ. 2700K	typ. 70lm	93	300mm	574-557-70/300
neutralweiß neutral white	10°	typ. 4000K	typ. 80lm	93	300mm	574-557-40/300
warmweiß warm white	30°	typ. 2700K	typ. 70lm	93	150mm	574-558-70
neutralweiß neutral white	30°	typ. 4000K	typ. 80lm	93	150mm	574-558-40
warmweiß warm white	30°	typ. 2700K	typ. 70lm	93	300mm	574-558-70/300
neutralweiß neutral white	30°	typ. 4000K	typ. 80lm	93	300mm	574-558-40/300

**Ökodesign-Richtlinie / ecodesign directive**

 Einstufung durchgeführt gemäß 2009/125/EG  
 classification according to 2009/125/EC

 Energieeffizienzklasse **A+**  
 energy efficiency class